


NEW
5 WINGS ROTOR
FOR MORE POWER
NEW GEARS
1300 RPM

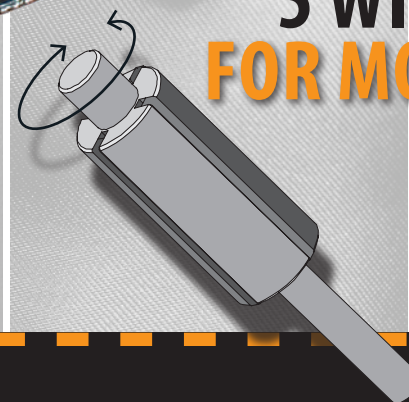

FP702

NEW PNEUMATIC HAND SHEAR

New FP702. The new cutting solution. Suitable for leather.



1946



1946

WHAT'S NEW:

- New 5 wings turbine
- New gears 1300 rpm
- New housing coating for heat reducing
- High manageability in 920 g

FOLLOW US:



RASOR ELETTROMECCANICA SRL

Via Vincenzo Caldesi 6 • 20161 Milan • Italy
 ph. +39 02 66 22 12 31 • fax +39 02 66 22 12 93
 info@rasor-cutters.com

www.rasor-cutters.com



NEW PNEUMATIC HAND SHEAR

CE □ FP702




TECHNICAL DETAILS:

- Muffled turbine motor with central back-located air exhaust
- 6 bar nominal* (± 1 bar) lubricated air supply
- Air consumption:** 9 std liters/sec*
- Power:** 380 W at nominal air supply conditions
- Blade:** 70 mm with hard metal counterblade
- Blade descr.:** 70EHSS, 70 mm dia., 6-edge, HSS steel
- Blade speed:** 1300 r.p.m.*
- Cutting ability:** up to 20 mm
- Sound pressure:** 72 dBe (EN ISO 15744)*
- Vibration Level:** 1,36 m/sec² (ISO 8662)*
- Net weight:** 920 g
- Total weight (with packing):** 1750 g
- Temperature range:** 0 – 55 C
- Umidity range:** 10 – 95% without condensate

*The reported data are collected at a pressure of 6 bar (ISO 2787: 1984), recommended operating pressure.



Minimum recommended



Rasor recommend to use only dry air lubricated with special Rasor VG 5 pneumatic oil



BLADES AVAILABLE:

- 70SHSS, 70 mm 4-edges, HSS steel | 70EHSS, 70 mm 6-edges, HSS steel | 70CHSS, 70 mm circular, HSS steel | 70DHSS, 70 mm 10-edges, HSS steel | 70SHSSTF, 70 mm 4-edges, HSS steel Teflon[®] coated | 70EHSSTF, 70 mm 6-edges, HSS steel Teflon[®] coated | 70EMD, 70 mm 6-edges, Carbide (Widia[®]) | 70DHSSTN, 70 mm 10-edges, HSS steel Titanium coated